


BondchemTM




BondchemTM

Mfg. BY :
BONDCHEM INDUSTRIES

Lajai Chokdi, Morbi-Rajkot Highway, Morbi-363642, Gujarat, INDIA.
E-mail :- bondchemind@gmail.com



@ Rahul Vyas 8460245009

- **GROUT**
 - **ADHESIVES**
 - **WATERPROOFING**
- ALL TYPE OF CONSTRUCTION CHEMICAL**



BONDCEM-SILVER



PACKING :. 20 kg.



TILE ADHESIVE



BONDCEM-SILVER

- APPLICATION** Polymer modified tile adhesive for fixing internal floor tiles. It gives excellent bond on concrete and plaster like surface. (Application on SIZE : 300x600, 300x450, 600x600 Wall & Floor Both)
- KEY FEATURES & BENEFIT**
- Single component just add water
 - Polymer modified
 - High bond strength
 - Better Work ability
 - Cost Efficient
- COVERAGE** Coverage is based on smoothness of substrate and thickness of mortar used. For a 3mm bed thickness the coverage will be 35-40 Sq.Feet per 20 kg. Bag.
- SELF LIFE & STORAGE** Best Before 12 Month from the date of manufacturing in unopened condition. Store in a cool & dry place
- PACKING** 20 kg.



BONDCEM-GOLD



PACKING :. 20 kg.



TILE ADHESIVE



BONDCEM-GOLD

APPLICATION

Polymer modified tile adhesive for fixing tiles internal and externally. It gives excellent bond on concrete and plaster like surface. (Application on Size: 600x1200, 800x800, 800x1600 WALL & FLOOR Both)

KEY FEATURES & BENEFIT

- Single component just add water
- Easy to use & better work ability
- Water Resistant
- Excellent Adhesion & strength
- Ensure permanent fixing

COVERAGE

Coverage is based on smoothness of substrate and thickness of mortar used. For a 3mm bed thickness the coverage will be 35-40 Sq.Feet per 20 kg. Bag.

SELF LIFE & STORAGE

Best Before 12 Month from the date of manufacturing in unopened condition. Store in a cool & dry place

PACKING

20 kg.



BONDCEM-DIAMOND GREY



PACKING :. 20 kg.



TILE ADHESIVE



BONDCEM-DIAMOND GREY

- APPLICATION** High Polymer modified tile adhesive for fixing tiles internal and externally. It gives excellent bond on concrete and plaster (Application on Size: 800x1600, 1200x1200, 1200x2400 all Slab tile Marble & Granites wall & Floor both)
- KEY FEATURES & BENEFIT**
- Single component just add water
 - Highly polymer modified
 - Easy to use & better work ability
 - Water and sock resistant
 - Bonds to various substrates
 - Excellent Adhesion & flexural strength
 - Ensure permanent installation
- COVERAGE** Coverage is based on smoothness of substrate and thickness of mortar used. For a 3mm bed thickness the coverage will be 35-40 Sq. Feet per 20 kg. Bag.
- SELF LIFE & STORAGE** Best Before 12 Month from the date of manufacturing in unopened condition. Store in a cool & dry place
- PACKING** 20 kg.




BONDCEM-DIAMOND WHITE



PACKING :. 20 kg.



TILE ADHESIVE

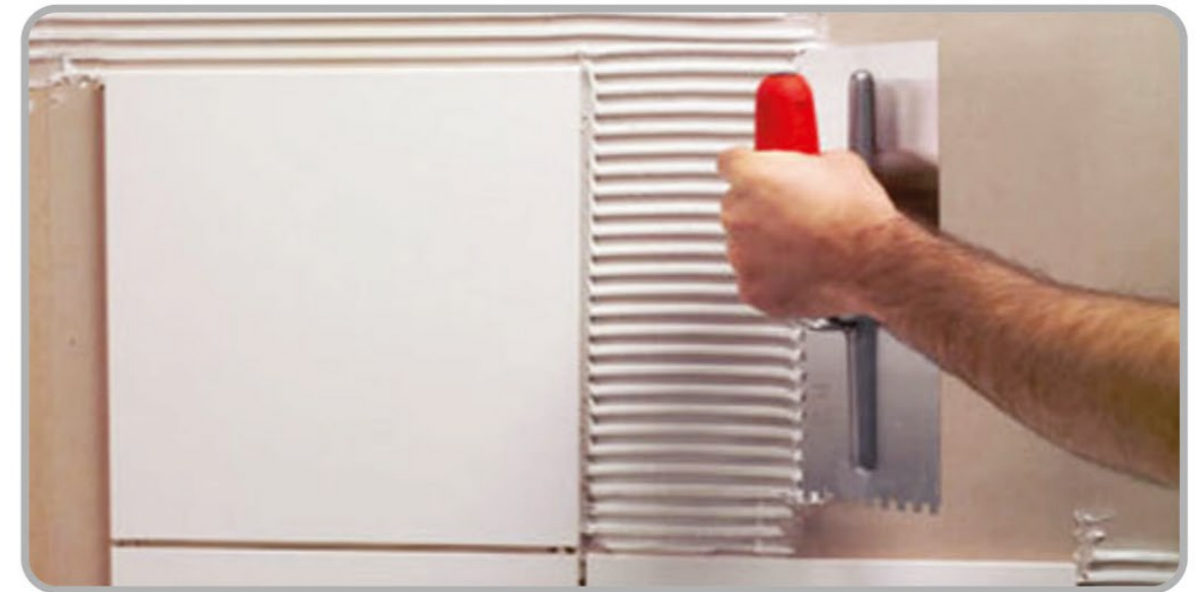

BONDCEM-DIAMOND WHITE

APPLICATION High Polymer modified tile adhesive for fixing tiles internal and externally. It gives excellent bond on concrete and plaster (Application on Size: 800x1600, 1200x1200, 1200x2400 all Slab tile Marble & Granites wall & Floor both)

KEY FEATURES & BENEFIT

- Single component just add water
- Highly polymer modified
- Easy to use & better work ability
- Water and sock resistant
- Bonds to various substrates
- Excellent Adhesion & flexural strength
- Ensure permanent installation

COVERAGE Coverage is based on smoothness of substrate and thickness of mortar used. For a 3mm bed thickness the coverage will be 35-40 Sq. Feet per 20 kg. Bag.

SELF LIFE & STORAGE Best Before 12 Month from the date of manufacturing in unopened condition. Store in a cool & dry place

PACKING 20 kg.



EPOXY GROUT



PACKING :. 1 kg, 5 kg.



EPOXY GROUT



DESCRIPTION Epoxy Grout is a three-part system, comprising of PART A, PART B and PART C for ease of application, The ability to fill tile / stone joints. The grout is best mixed to a smooth, creamy consistent paste. Epoxy resin based grout has a high degree of resistant to chemicals, abrasion and higher impact resistance. The cured grout-creates-tough, impermeable layer-resistant to food drops, bacteria, and dirt is easily maintained in a spiral condition.

FEATURES Stain less and easy to clean, easy to mix and apply.
Provides excellent chemical resistant property.
Provides hygienic, hard wearing & impervious properties.
Non-cracking or powdering.
Non-Toxic & restricts entry of bacteria / dirt.

PACKING 1 kg & 5 kg



TILES CLEANER



PACKING :. 1 Ltr.



TILES CLEANER



DESCRIPTION Epoxy Grout is a three-part system, comprising of PART A, PART B and PART C for ease of application, The ability to fill tile / stone joints. The grout is best mixed to a smooth, creamy consistent paste. Epoxy resin based grout has a high degree of resistant to chemicals, abrasion and higher impact resistance. The cured grout-creates-tough, impermeable layer-resistant to food drops, bacteria, and dirt is easily maintained in a spiral condition.

FEATURES Stain less and easy to clean, easy to mix and apply.
Provides excellent chemical resistant property.
Provides hygienic, hard wearing & impervious properties.
Non-cracking or powdering.
Non-Toxic & restricts entry of bacteria / dirt.

PACKING 1 Ltr.



PACKING :. 1 Kg.




DESCRIPTION High quality fine, polymer-modified, water-resistant, cement-based powder grout designed for grouting glazed wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles etc.,

FEATURES Polymer modified grout.
Good compressive strength.
Available in range of colours
Depends on substrate

SELF LIFE & STORAGE Best Before 12 Month from the date of manufacturing in unopened condition. Store in a cool & dry place


PACKING 1 kg.

AVAILABLE COLOUR

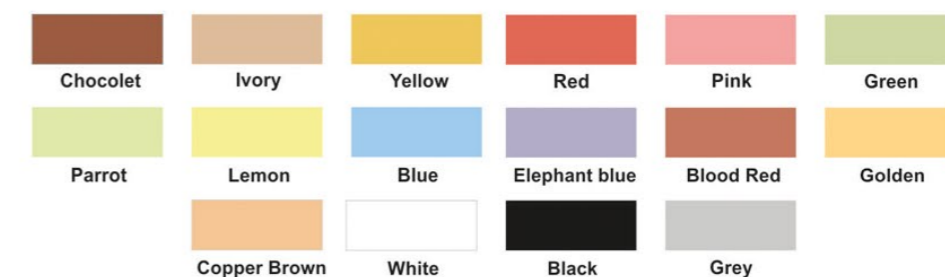



PACKING :. 100ml.

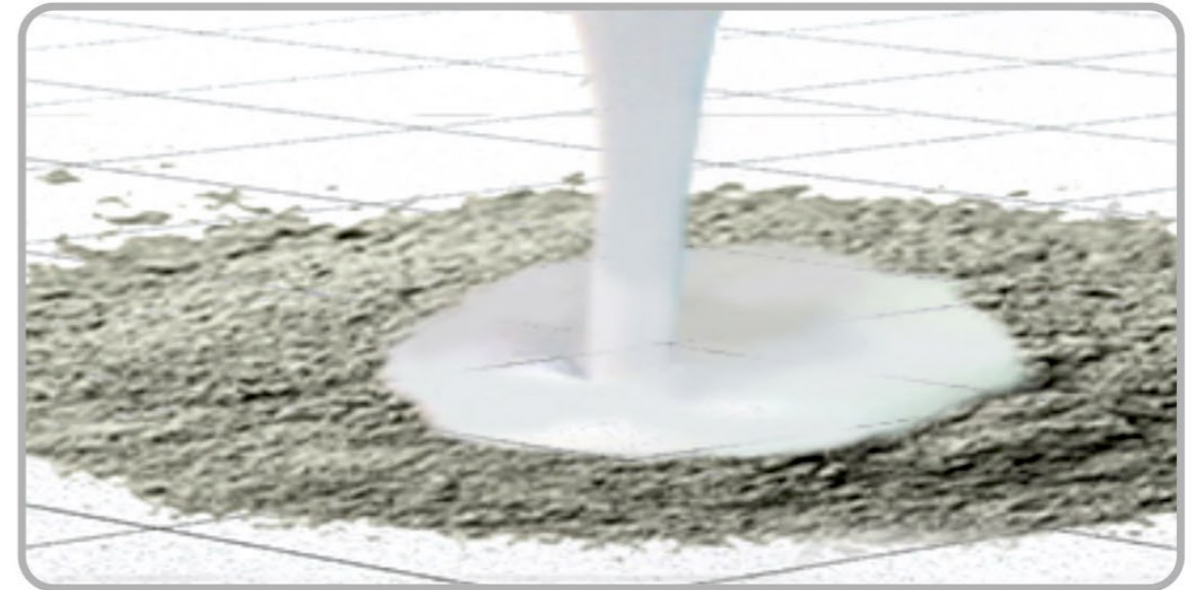

DESCRIPTION BOND CHEM Grout Admix is specially designed Grout admix to be used with sanded & Unsanded Grout.

FEATURES It improves the performance of Portland Cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations.

COVERAGE Varies as per application

PACKING 100 ml.




BOND CHEM EPOXY ADHESIVE



PACKING :. 1.8 Ltr.



BOND CHEM EPOXY ADHESIVE

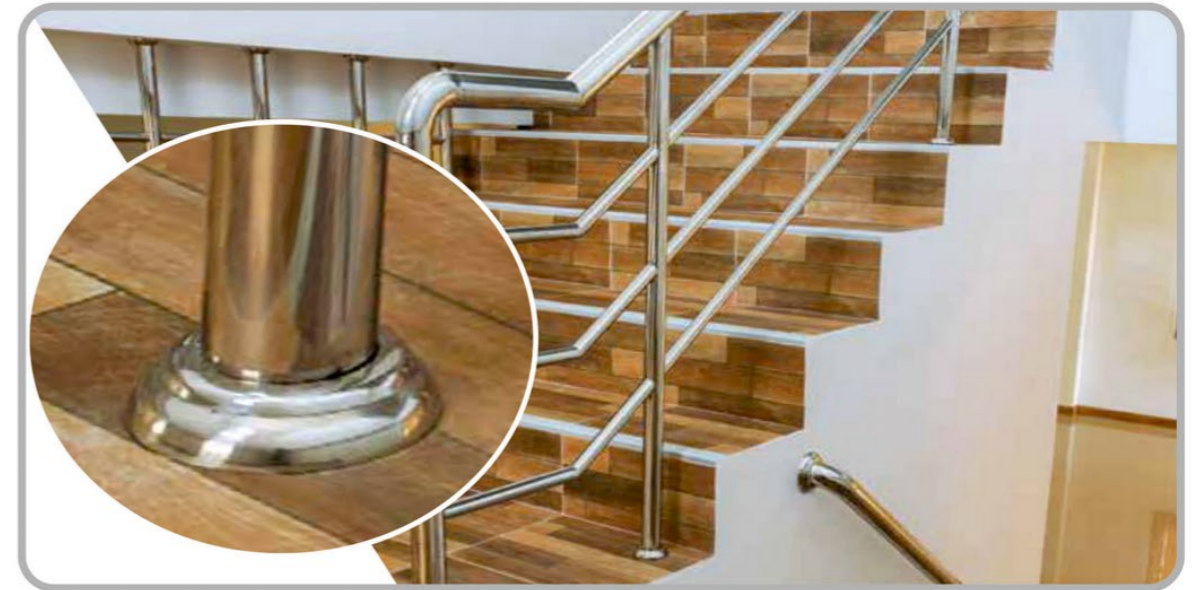

- DESCRIPTION** Bond Chem Epoxy Adhesive is a two component modified, viscous epoxy adhesive system, It Provides excellent bond strength for various substrates including glass, metals, reactive Plastics, Wood, Textile and natural Stones
- FEATURES**
Clear and transparent system
Excellent for crack filling and pinhole filling
compatible with pigments
Good colour stability
- COVERAGE** 80-90 Sq ft per kg
- Application** Marble Joints, Road reflectors, Grouting of Steel Railings
Jewel stone fixing, Stone & Marble fixing.
- PACKING** 1.8 Ltr.



PACKING :. 1.5 Kg.

DESCRIPTION Bond Chem Epoxy Adhesive is a two component modified, viscous epoxy adhesive system, It Provides excellent bond strength for various substrates including Kitchen, Under water, Marble Joints

FEATURES To Bond a wide range of materials with Exceptional mechanical strength
Excellent electrical insulation properties
Are non-toxic and non corrosive

COVERAGE 80-90 Sq ft per kg
Application Kitchen Tile Fixing, Under water Tile Fixing, Marble Joints

PACKING 1.5 Kg.



PACKING :. 1.5 Kg.



- DESCRIPTION** Crack & Fix Concrete primer, injection grouting, mortar, screed, bonding of new and old concrete anti-corrosive, water proofing of terrace and bathroom, coating for bars.
- FEATURES** Excellent adhesion to metal and concrete, shrinkage, High mechanical and better vibration damping, resistance to oil and chemicals.
- Application** New concrete bonding, mortar repair, civil application
- PACKING** 1.5 Kg.

TILES SPACER


ADVANTAGES

At the most basic level, spacers have a pretty simple purpose: they will allow you to keep the tiles at equal distance, enabling you to space them correctly and get a symmetrical result. However, their benefits don't stop there.

METHOD OF APPLICATION

if you plan to undertake tile installations at home, be sure to obtain some tile spacers for your project. Spacers are small cross-like or T-shaped pieces of plastic, ceramic or wood which help you to space your tiles apart in equal distance. They come in various sizes, although most commonly used spacers range in width from 1/4 to 3/8 of an inch. To use spacers, you need to lay 4 tiles at a time on the work surface. You place the spacers at the corners of each tile and then push the tiles together until they can go no further. Once you complete your tile installation, you can remove the spacers and save them for a future project. Spacers can help you to accomplish a well installed and attractive tile arrangement on floors, walls or countertops in your home.

Available Size:- 2mm, 3mm, 4mm, 5mm, 6mm, 8mm, 10mm

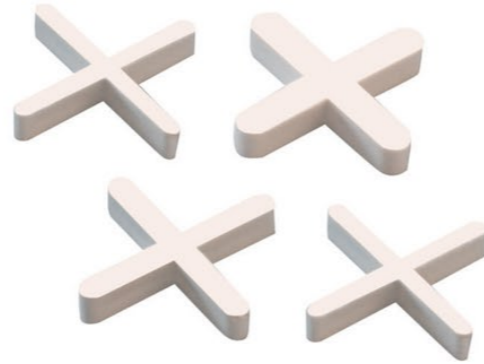


TILES EQUALIZER

APPLICATION AREAS

Walls, Floors, Interiors, Exteriors, Dry & wet areas, showers, Swimming pools

Size \ Area	1m ²	2m ²	5m ²	10m ²	20m ²	50m ²
30x30 cm	12	24	60	120	240	600
40x40 cm	25	50	125	250	500	1250
50x50 cm	15	30	75	150	300	750
30x60 cm	18	36	90	180	360	900
60x60 cm	12	20	50	100	200	500
80x80 cm	10	20	45	80	140	360

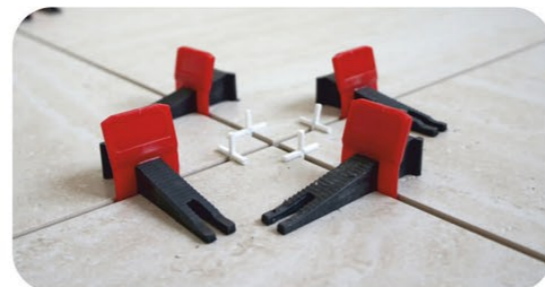

PACKING 50 (Clip) + 50 (Wedge)

BONDCEM chemical company is considered as one of the leading supplier of construction chemical product in india. BONDCEM construction chemical company is an iso 9001-2015 certified company. creed is fastest growing indian company in the field of construction chemical with the brand name of BONDCEM . our product range of construction chemical such as epoxy and grout, adhesives, admixtures, sealers and other for various application like grouting, fixing of tiles, waterproofing etc.

The Same is reflected in our end product which is of international standard AN ISO 9001:2015/:Assist people achieve their objectives & in return you will achieve yours," BONDCEM management believes that our success lies in the success of our business partners.

